


GBK4136 086/001501

GRP DIS BOX MOUNTING ASSEMBLY FOR CPTK2903



TOP VIEW

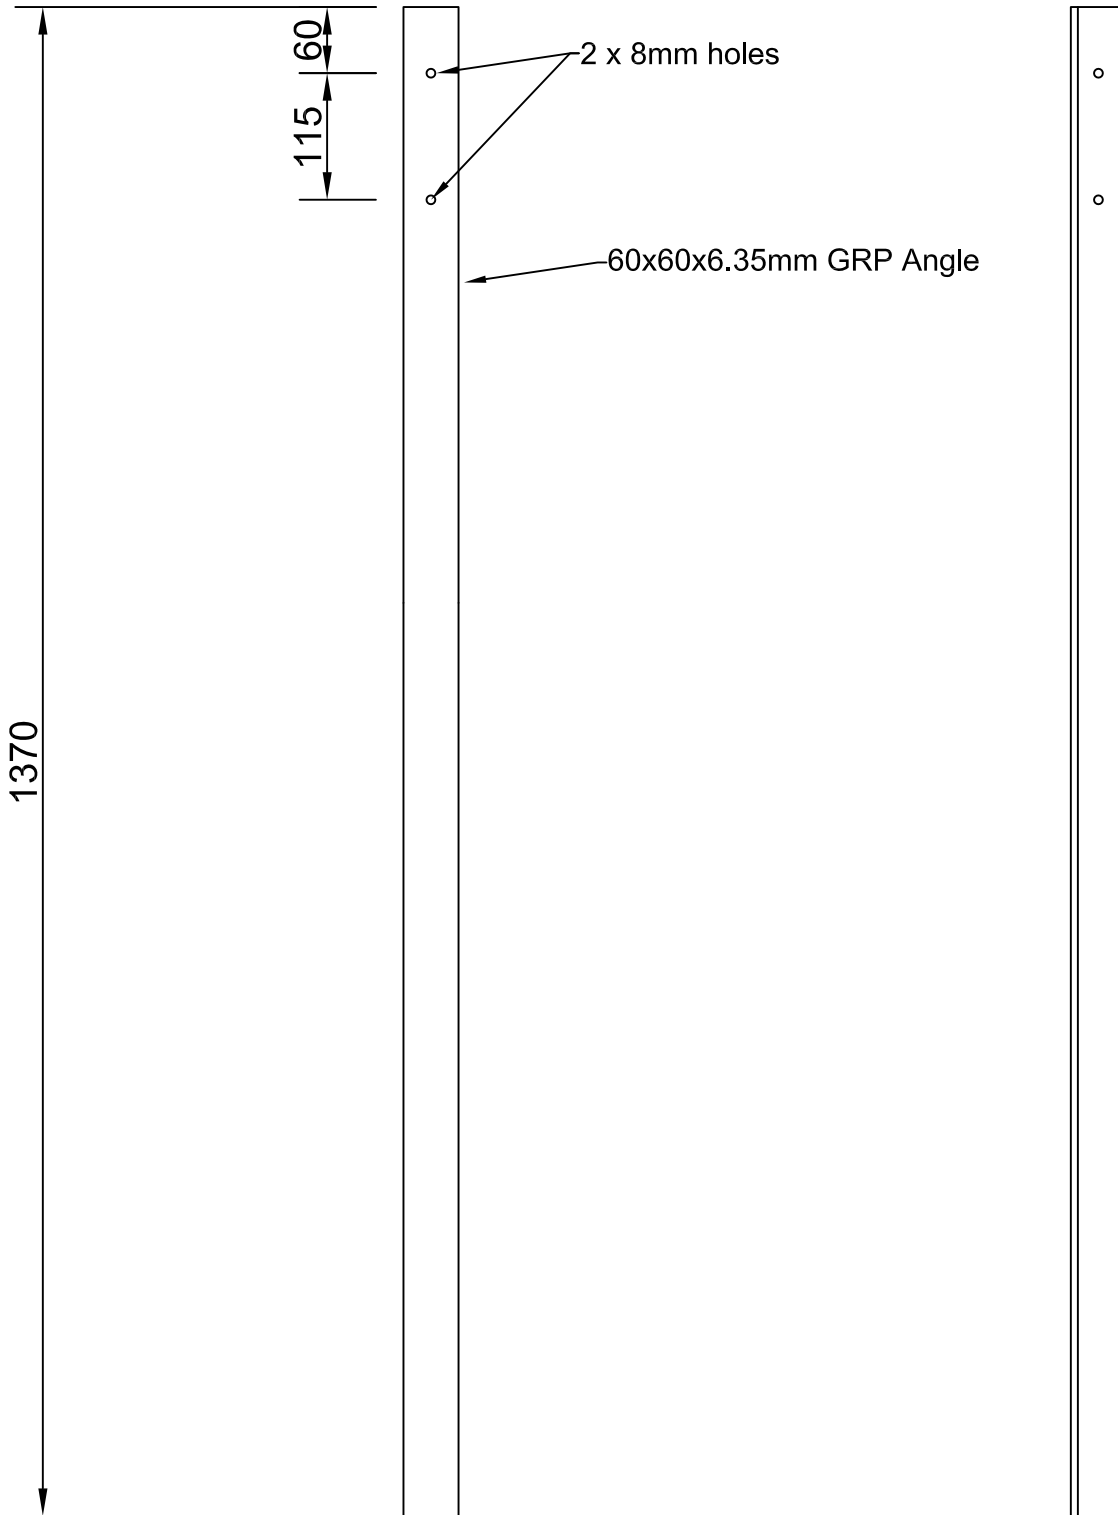

FRONT VIEW

REAR VIEW

GRP Mounting Accessories Data Sheet

	Standard	Alternative
Material	ISO Polyester Resin	
Fire Rating	Class 2 Fire Rated	Modar
Length	3000mm	6000
Width	50-300mm	
Type	Slotted	Plain
Fittings	All Stainless Steel	

Specifications

Manufactured glass by the pultrusion process from isophthalic polyester thermosetting resin reinforced with E glass giving a high strength dimensionally accurate and thermally stable product. The pultruded sections fully comply with all the requirements of EN13706, grade E17

-
Specification of pultruded profiles.

The standard polyester resin is halogen free fire retardant grade satisfying the requirements of BS476 Pt7, Class 2 and ASTM E84 25 sec - Surface spread of flame. Higher grade fire retardant products can be manufactured to order including the high fire resistance, low smoke and low toxicity required by the London Underground (LUL). They can also be made to order in the highly CLrosion resistant vinyl ester resin.

Normally electrical non-conductive but for those applications with risk explosive atmospheres an anti-static version is available to order.

distributed load in Kg over the span

SPAN (M)	1	1.5	2	2.5	3
DEFLECTION (MM)	5	7.5	10	12.5	15
	UDL in Kg at this span for deflection limited to span /200				
100x50	231	103	58	37	26
150x50	247	110	62	39	27
200x50	271	121	68	43	30
300x50	294	131	74	47	33