



MONOBLOCK INDUSTRIAL ENCLOSURE IP66

PA05/07019

Polyester enclosure 400 x 400 x 200 mm



FEATURES

- Boxes & Cabinets made from fiber glass reinforced polyester, moulded by hot compression.
- Colour Light Grey RAL 7035
- Self-extinguishibility: 960° test withstanding. Halogen free. Double insulation. No electrical contact risks. Degree of protection Ip66 UNE 20324 (EN 60529).
- Certification of compliance with IEC62208 enclosure standard. Suitable for indoor or outdoor use.
- Large door opening (180°). Version with plain or glazed door. Reversibility for installation right or left door opening.
- · Anti-intruder hinges system.
- Customise service: colour, machining, mounting accessories, locks, company logo.
- 2 lock with double-bar insert or 1 lock with 3 action points and vandalism-proof.
- Version with metallic or polyester mounting plate.
- Resistant to harsh atmospheres.
- Light weight gives an easy installation.
- 25years. Long life lasting without maintenance under standard environmental conditions.

GrayBar


MONOBLOCK INDUSTRIAL ENCLOSURE IP66

0086/000136


Polyester enclosure 400 x 400 x 200 mm





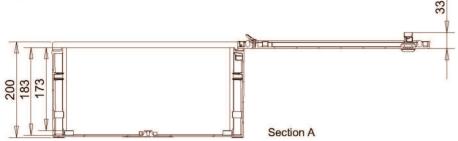



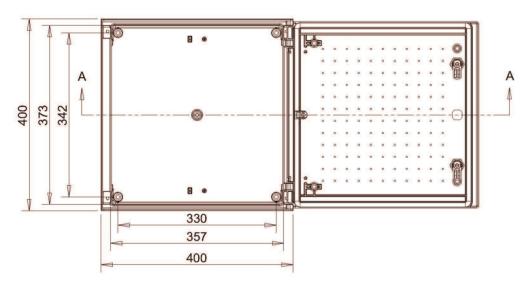



Environmental performance

Minimum temperature -30 °C IP dust water protection degree IEC-60529 66

Maximum temperature 120 °C IK impact protection degree IEC-50298 10

Compression resistance 100 kg

Electrical performance

Nominal tension direct current up to:	1500 VdC	
Nominal tension alternative current up to:	1000 VaC	
Maximum power dissipation $\Delta T = 104$ °F (wall surface)	72,6 W	

Installation and assembly system

Inside installation	Yes	Wall surface	Yes
Outdoor installation	Yes	Floor mounting	Yes
Flush mounting	No	Pole mounting	Yes

Project: Products – Enclosures

Ref:

TDS-GBK4128P - Technical Data Sheet



Points Heating Junction Box

GrayBar Part No. GBK4128P

